


## WVFL-SAF-ST


GLOBE VALVE-STRAIGHT TYPE

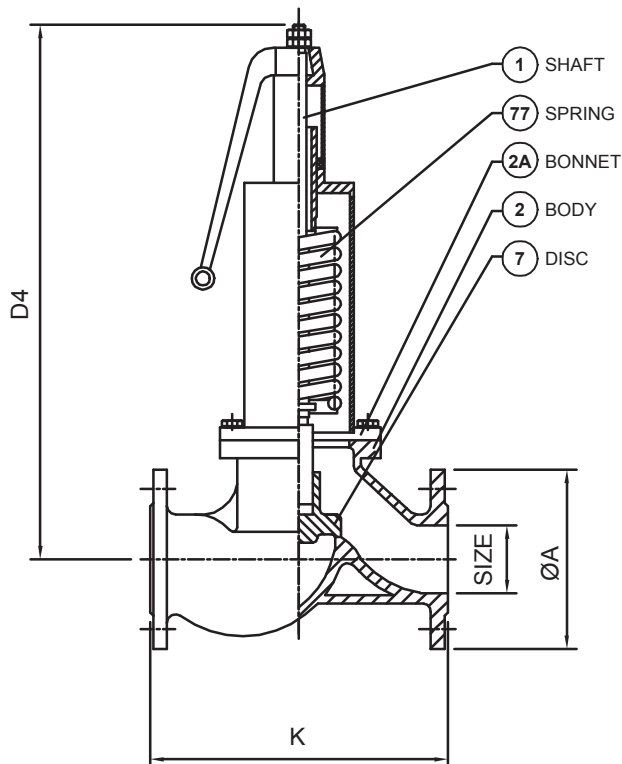

**PN16 SPRING LOADED**  
 -MAX. 180°C  
 -CAST IRON / SEAT ST. STEEL

## WVFL-SAF-AN

GLOBE VALVE-ANGLE TYPE

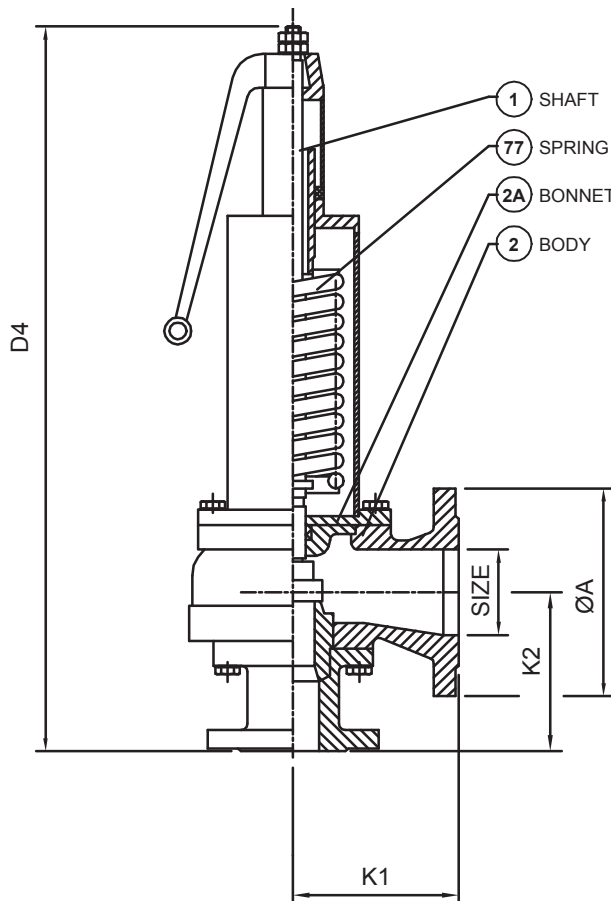

### WVFL-SAF-ST

SIZE mm	SIZE inch	ØA PN10/PN16	D4	K	kg
15	1/2"	95	235	130	5
20	3/4"	105	240	150	6
25	1"	115	240	160	7
32	1.1/4"	140	295	180	9
40	1.1/2"	150	360	200	12
50	2"	165	400	230	16
65	2.1/2"	185	400	290	19
80	3"	200	460	310	26
100	4"	220	575	350	41
125	5"	250	650	400	54
150	6"	285	710	480	80

### WVFL-SAF-AN

SIZE mm	SIZE inch	ØA PN10/PN16	D4	K1	K2	kg
15	1/2"	95	277	100	100	5
20	3/4"	105	395	105	105	10
25	1"	115	405	115	115	10
32	1.1/4"	140	445	125	125	15
40	1.1/2"	150	465	145	145	20
50	2"	165	630	155	155	37
65	2.1/2"	185	670	175	175	41

ON REQUEST -CAST STEEL / BRONZE / GGG-40